

→ Design 70-V Set

	Cat. No.
For 1-leaf sliding doors, without running track, with door stopper set and floor guide	940.64.006

Order reference






Running gear pre-mounted for glass thickness 8 mm. Accessories for other glass thicknesses (6/10/12 mm) supplied.

→ Tracks and accessories

Note

Drilling distances for wall mounting the running track 1,804 mm: 132 / 513 / 514 / 513 / 132 mm

Drilling distances for wall mounting the running track 2,104 mm: 132 / 613 / 614 / 613 / 132 mm

		Material	Finish	For glass thickness mm	Length mm	Cat. No.
Running track, pre-drilled (4 times), for wall mounting		Stainless steel	Matt	–	1804	940.64.918
					2104	940.64.921
Wall mounting set, for pre-drilled running track (4 times), wood to metal dowels M8 x 80 mm		Stainless steel	Matt	6 – 12	–	940.64.032
Spacer set, thickness 2 mm 4 pieces		Stainless steel	Matt	–	–	941.07.105
Spacer set, thickness 5 mm 4 pieces		Stainless steel	Matt	–	–	941.07.106
Spacer set, thickness 10 mm 4 pieces		Stainless steel	Matt	–	–	941.07.107

Order reference

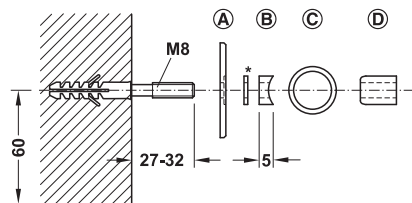
Order 1 wall mounting set for each running track.

Fixing material (wood to metal dowel and plastic wall plug) supplied with the wall mounting set.

Spacers for compensating the wall distance as required.

Installation

Wall mounting set for glass thicknesses 6 – 12 mm



- Ⓐ = support plate \varnothing 50 mm
- Ⓑ = spacer 5 mm
- Ⓒ = running track
- Ⓓ = fixing bolt

* Spacers with thickness 2, 5 or 10 mm can additionally be used for compensating the wall distance.
(Only use 1 additional spacer per wall installation.)

Door handles for sliding doors	▶ AH 1.105
Accessories	▶ AH 7.130
Door seals for sliding doors	▶ AH 7.132

Flush pull handles	▶ AH 7.174
Sliding door locks	▶ AH 8.56